


RoHS compliant

REV	MODIFICATION	DATE
A0	ISSUE	2025.10.29

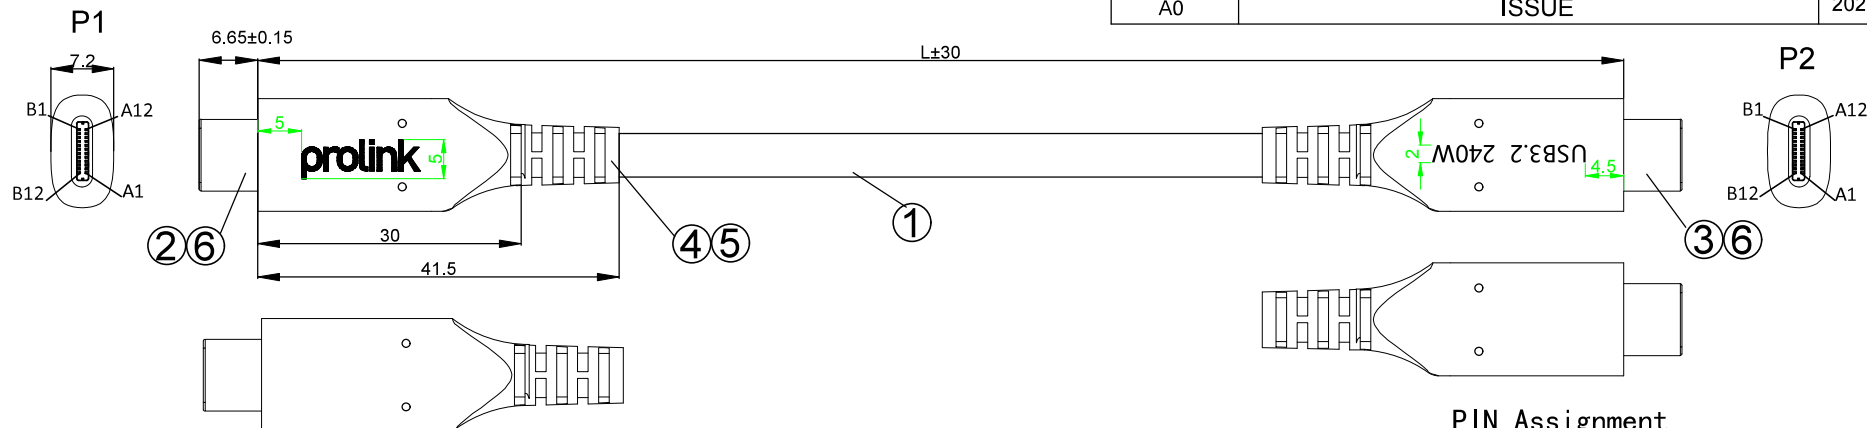

P/N CHART

HX P/N	P/N	L±T
201930261	CL1200BK-0050	500±30
201930262	CL1200BK-0080	800±30
201930263	CL1200BK-1000	1000±30
201930264	CL1200BK-1500	1500±30
201930265	CL1200BK-2000	2000±30


A. Electronic Tests:

- Open/Short/Intermittence: 100%
- Hi-Pot: AC 100V 0.01S 1mA
- Insulation Resistance: DC 300V 0.1S 10MΩ Min
- Conductive Resistance: 2Ω Max
- Display port practical application test:
PASS 4K*2K@120Hz with DSC

B. Feature

- Full feature USB3.2 (Gen 2x2) cable:
Transmission rate up to 20Gbps
- Resolution 3840*2160*60Hz
- Backwards compatible with USB3.2, 3.0 and 2.0 and Thunderbolt 3
- Supports USB power deliver 3.2 48V5A/240W
- RoHS 2011/65/EU and amendment directives (EU)
2015/863 compliant: REACH 1907/2006/EC compliant

PIN Assignment

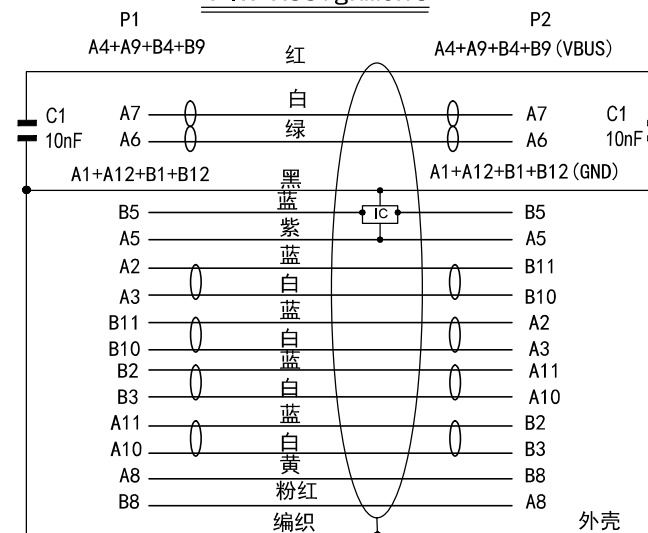

⑥	DUST CAP	Dust cap for Type C Male plug	2	PCS				
⑤	Over molding	45P Black PVC	A/R	g	角法 PROJ:	容 忍 公 差 TOLERANCE:	XX= XXX=	产 品 名 称 PRODUCT NAME: SEE " P/N CHART"
④	Inner molding	LD PE	A/R	g	比 例 SCALE:	版 本 REV:	A	产 品 料 号 PART NO: SEE " P/N CHART"
③	CONN.2	U4 Type C Male, Gold-plated contacts, Nickel-plated shell + Tinplate. IC: HUSB332D	1	PCS	单 位 UNIT:	页 次 SHEET:	1/1	客 户 CUST:
②	CONN.1	U4 Type C Male, Gold-plated contacts, Nickel-plated iron shell + Tinplate	1	PCS	客 户 回 签 SUST. APPROVED:	Ningbo FTZ Tianning Technological Electronics Co. Ltd		
①	CABLE	(7/0.08T*1P+AL+HM)*4C+7/0.08T1P+7/0.08T*4C+41/0.08T*2C+ 4D(41/0.08T), Graphene conductive tape, Black PVC, OD 4.5mm+ Black Fabric Braiding	L	MM	核 准 APPROVED:			
					审 核 CHECKED:			
NO	NAME	SPECIFICATION	Q'TY	UNIT	制 图 DRAWING:			
					YUCHENG SHI 2025.10.29			