



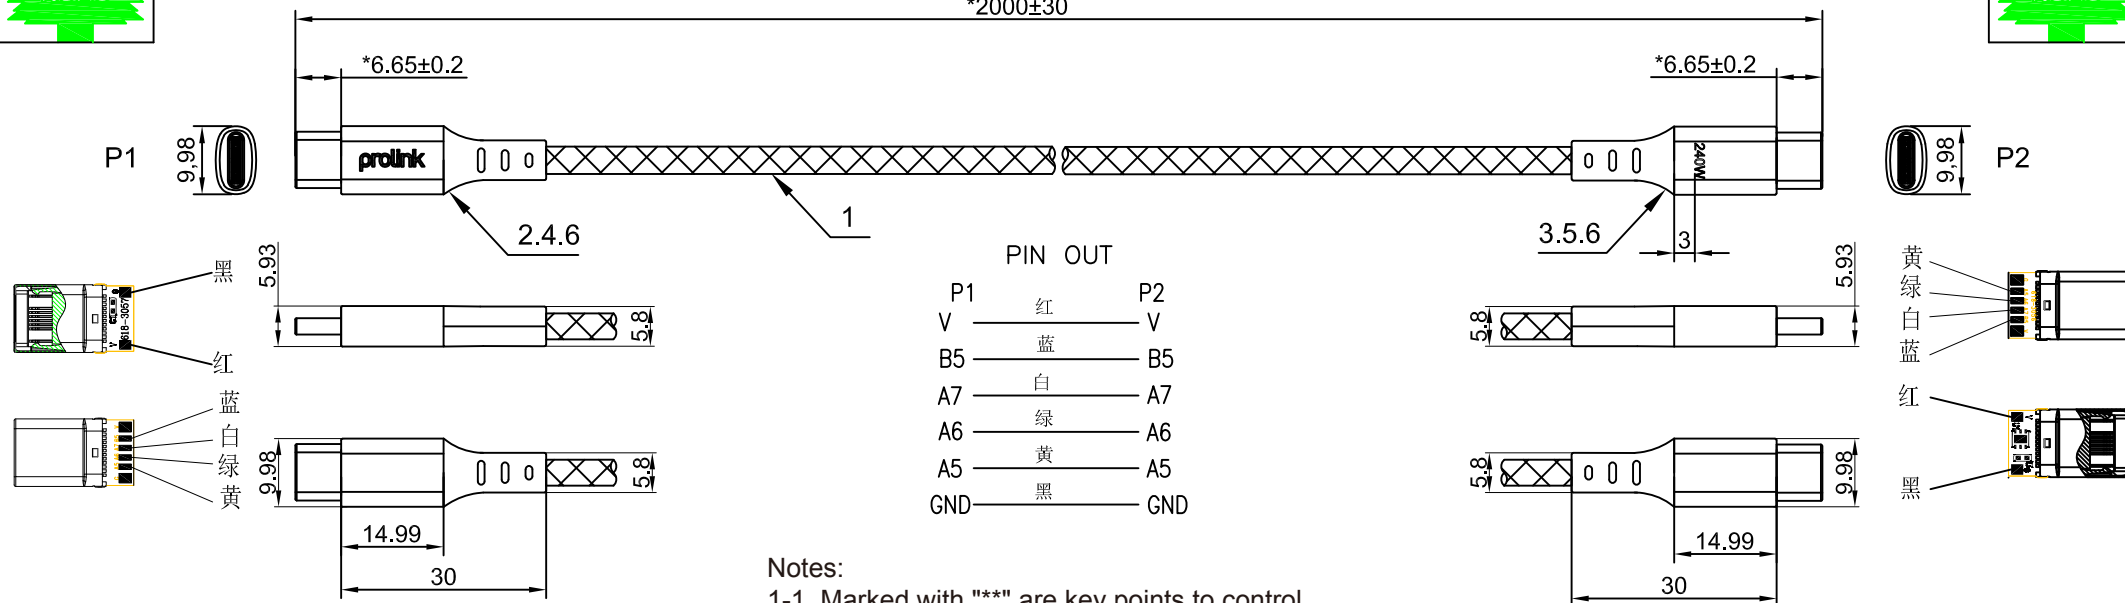


prolink

9.5*3.1mm
LOGO放大图
上下左右居中
单面黑雕

240W

5.2*1.5mm
LOGO放大图
上下居中
单面黑雕

6	Compound	31040002	Compound: Black TPE 95A, UV Resistance Class 3	6	G
5	Aluminum Shell	3301010911	Aluminum Shell, size: 14.99*9.98*5.93mm, Gray, Single Side Laser "240W"	1	PCS
4	Aluminum Shell	3301011121	Aluminum Shell, size: 14.99*9.98*5.93mm, Gray, Single Side Laser "Prolink"	1	PCS
3	Connector	36010096	Type-C Male 16PIN, 6 solder Points, Wire-to-board type, No IC chip, nickel-plated copper Shell, black core	1	PCS
2	Connector	36010107	Type-C Male 16PIN, 6 solder points, Wire-to-board type, With E-Marker Chip, nickel-plated copper Shell, black core	1	PCS
1	Cable	205010600	Cable 6-conductor, 30AWG*4C+22AWG*2C+AL Foil, black TPE, 48/24 fabric braid, OD: 4.0mm	2	M
NO.	PART NAME	PART NO	SPEC DESCRIPTION	QT'Y	UNIT

B	变更模具编号 变更人: 杨艳蓉				26/05/15	
A	INITIAL RELEASE				26/01/30	
REV	DESCRIPTION OF CHANGE				DATE	
未注公差尺寸	公差范围 (mm)		Ningbo FTZ Tianning Technological Electronics Co. Ltd			
	铝壳	塑胶				
	0<DIM≤120 ±0.05	0<DIM≤80 ±0.05				
	120<DIM≤180 ±0.10	80<DIM≤150 ±0.10				
	180<DIM ±0.15	150<DIM ±0.15				
	角度 ±1.0°					
DRAWN BY 杨艳蓉		SCALE 1:1		REV	B	
		UNIT MM				
CHECK BY		SHEET 1/1	CUSTOMER:			
APPD BY		DATE 26/01/30	DWG NO.: LT26-0029			
		TITLE: C TO C Cable PD240W 全长L=2M 黑色48锭低弹纱编织 黑色成型 灰色铝壳				
		CUSTOMER. P/N:				