


P/N CHART

HX P/N	P/N	L±T
201930273	CL1220BK-0050	500±30
201930274	CL1220BK-0080	800±30
201930275	CL1220BK-0100	1000±30
201930276	CL1220BK-0150	1500±30
201930277	CL1221BK-0200	2000±30
201930278	CL1221BK-0300	3000±40

PIN OUT

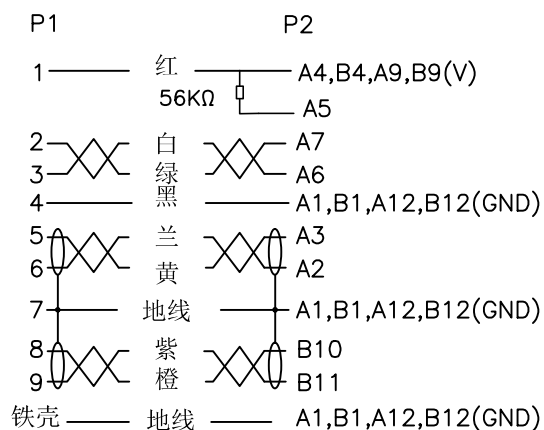

A.Electronic Tests:

- a.Open/Short/Intermittence: 100%
- b.Hi-Pot: AC 100V 0.01S 1mA
- c.Insulation Resistance: DC 300V 0.1S 10MΩ Min
- d.Conductive Resistance: 2Ω Max

B.Transmission rate up to 10Gbps within 2 meter
and 5Gbps at 3 meter

C. Supports USB power deliver current up to 3A

⑤	Over molding	80A Black TPE	13	G	角法 PROJ:	容 忍 公 差 TOLERANCE: XX= XXX=	产 品 名 称 PRODUCT NAME: SEE " P/N CHART"
④	Inner molding	LDPE	5	G	比 例 SCALE: NONE	版 本 REV: A	产 品 料 号 PART NO: SEE " P/N CHART"
③	CONN.2	Type C Male, Gold-plated contacts, nickel-plated iron shell + PCB, 56KΩ pull-up resistor	1	PCS	单 位 UNIT: MM	页 次 SHEET: 1/2	客 户 CUST:
②	CONN.1	USB3.0 Type A Male, Gold-plated contacts, Blue core, Nickel-plated iron shell	1	PCS	客 户 回 签 SUST APPROVED:	Ningbo FTZ Tianning Technological Electronics Co. Ltd	
①	CABLE	[32AWG(7/0.08T)*1P+Drain wire(7/0.08T)+AL-MY]*2P+ 32AWG(7/0.08T)*1P+24AWG(41/0.08T)*2C+Drain wire(7/0.08T), Graphene conductive TPE black jacket, OD: 4.5±0.2mm	L	MM	核 准 APPROVED: 审 核 CHECKED: 制 图 DRAWING: Ceasar 2026.01.13		
	NAME	SPECIFICATION	Q'TY	UNIT			